


2/1/2008

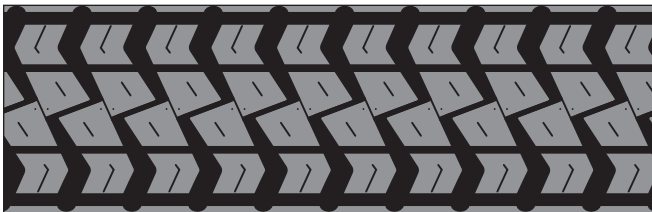

**BDM™ Features:**

- Unique design for the refuse and construction industries.
- Molded from a revolutionary rubber compound that provides significant improvement in wear at the lowest cost per mile.
- Computer optimized design engineered for excellent treadwear in on/off road applications.
- A deep tread, combined with wide voids, provides aggressive mud and snow traction.
- For radial tires only.

**BDM™** BDM™ (Bandag Drive Mixed Service)  
**Adding Size 280mm**

**Ordering Information:**

Tread Size	Item Number	Skid Quantity	Tread Depth
190mm	1001969	20	26/32
200mm	1001970	20	26/32
210mm	1001971	20	26/32
220mm	1001972	20	26/32
230mm	1001973	16	26/32
240mm	1001974	16	30/32
*250mm	1001975	20	32/32
*260mm	1001976	20	32/32
*270mm	1001977	20	32/32
<b>*280mm</b>	<b>1001978</b>	<b>20</b>	<b>32/32</b>

\*Tread sizes 250, 260, 270, and 280 have 17 feet of tread per roll. All others have 34 feet.

**Curing Information:**

Rim, Flange and Tube	Inside Envelope	ARC™
4 hrs. 10 min. Extended	3 hrs. 50 min. Extended	3 hrs. 40 min. Extended

**Other Information:**

CAM Setting	Strip Wick	QuickCure™
1	No	Yes

BDM™ is eligible for PowerPlus funds.

